

TERRA BOUND SOLUTIONS

20020 Hickory Twig Way • Spring, Texas 77388

Phone: 1-877-857-2915 • Fax: 281-288-2870

Email: contact@terraboundsolutions.com

Web: www.terraboundsolutions.com

Recommended Crew:

Minimum 2 People

Tools Required for Assembly:

T-30 TORX Bit

3/16" x 6" Drill Bit

Post Hole Digger / Shovel / Auger

Tape Measure

Level

High Speed 3/8" electric drill w/ clutch

Installation Time:

20 to 30 minutes

Concrete Required:

1.8 cu ft. per post

Note: Concrete must have a minimum rating of 2,500 psi and must be mixed per manufacturers recommendation.

This space intentionally left blank.

Standard Hardware

5/16" x 5"
RSS Stainless




5/16" x 4"
RSS Stainless

5/16" x 3-1/8"
RSS Stainless

5/16" x 2-1/2"
RSS Stainless

1/4" x 2-1/2"
RSS Stainless

#10 x 2-1/2"
R4 Stainless

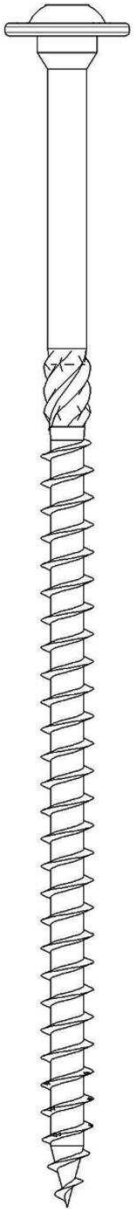

NOT TO SCALE!

Pre-Installation Check


Check off all items received, against the packing list. Notify your local sales representative immediately of any items that are missing or that may be damaged.

**TERRABOUND SOLUTIONS IS NOT RESPONSIBLE
FOR ITEMS DISCOVERED MISSING
AFTER 72 HOURS FROM TIME OF
DELIVERY.**

**PRE-DRILLING IS REQUIRED. ALL LOCATIONS WHERE
HARDWARE IS TO BE FASTENED REQUIRES PRE-
DRILLING TO ENSURE PROPER INSTALLATION AND
STRUCTURAL INTEGRITY. WE ARE NOT RESPONSIBLE
FOR INSTALLATION OR STRUCTURAL ISSUES THAT
ARISE FROM NOT PRE-DRILLING ATTACHMENTS.**

This space intentionally left blank.


Dog Totter Assembly

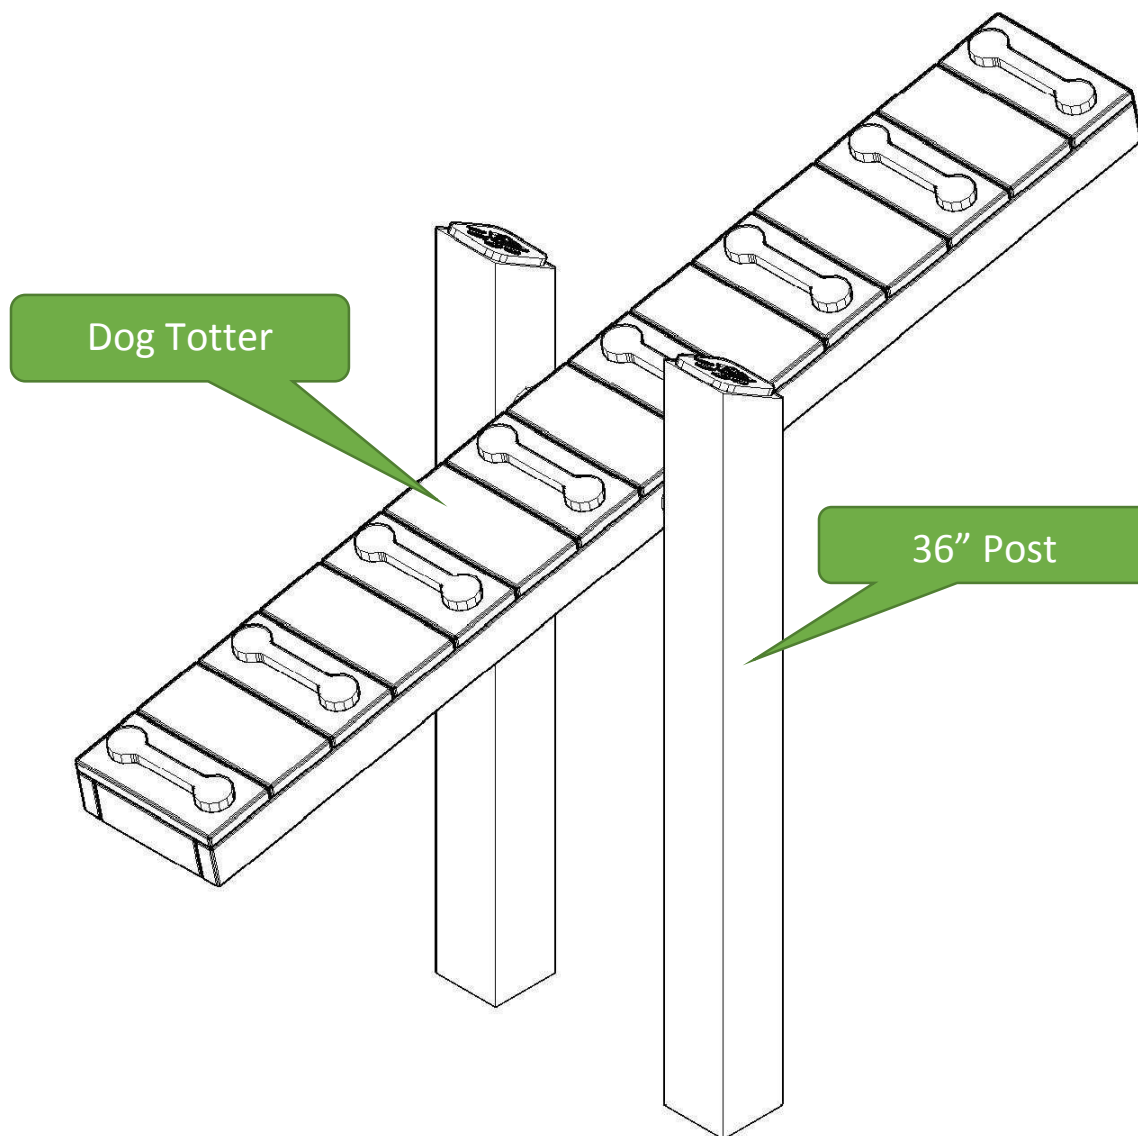

Dog Totter Assembly (Contd.)



Please reference the footer drawing provided for the hole placement of the item(s) below. We recommend you dig your footer holes prior to the assembly of your equipment to aid in the ease of installation.

The Dog Totter comes fully assembled, as shown below, for your ease of installation. When the Dog Totter arrives at your location, care has to be taken when removing it from the pallet. Since the assembly is hinged there is a possibility that when unloading it the post supports (A) might swing back and cause injury to the person unloading it. It is recommended 2-4 people unload the totter for maximum safety.

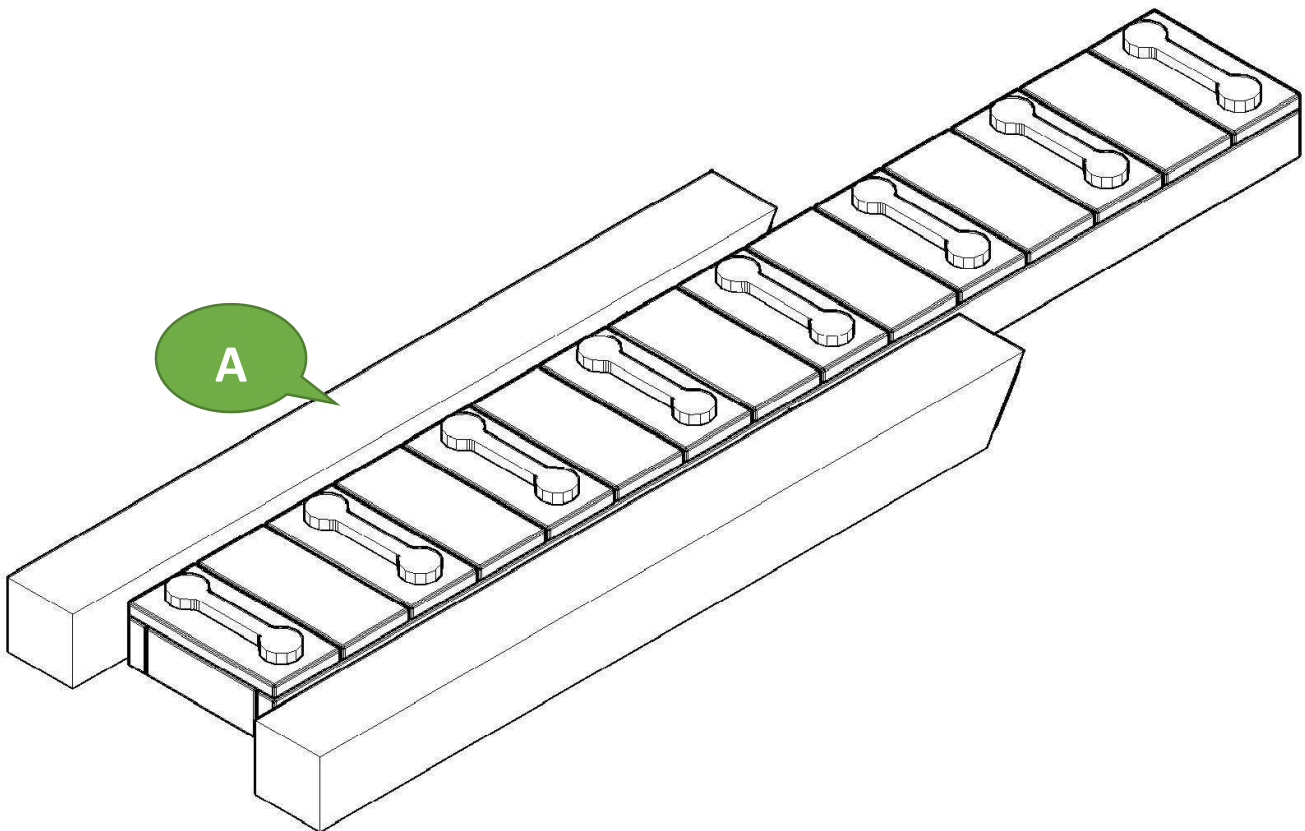

Dog Totter Assembly (Contd.)

Once the Dog Totter is unloaded, the installation is as simple as swinging the support posts 90° and placing them into the footer locations which can be referenced on the Dog Totter spec sheet provided.

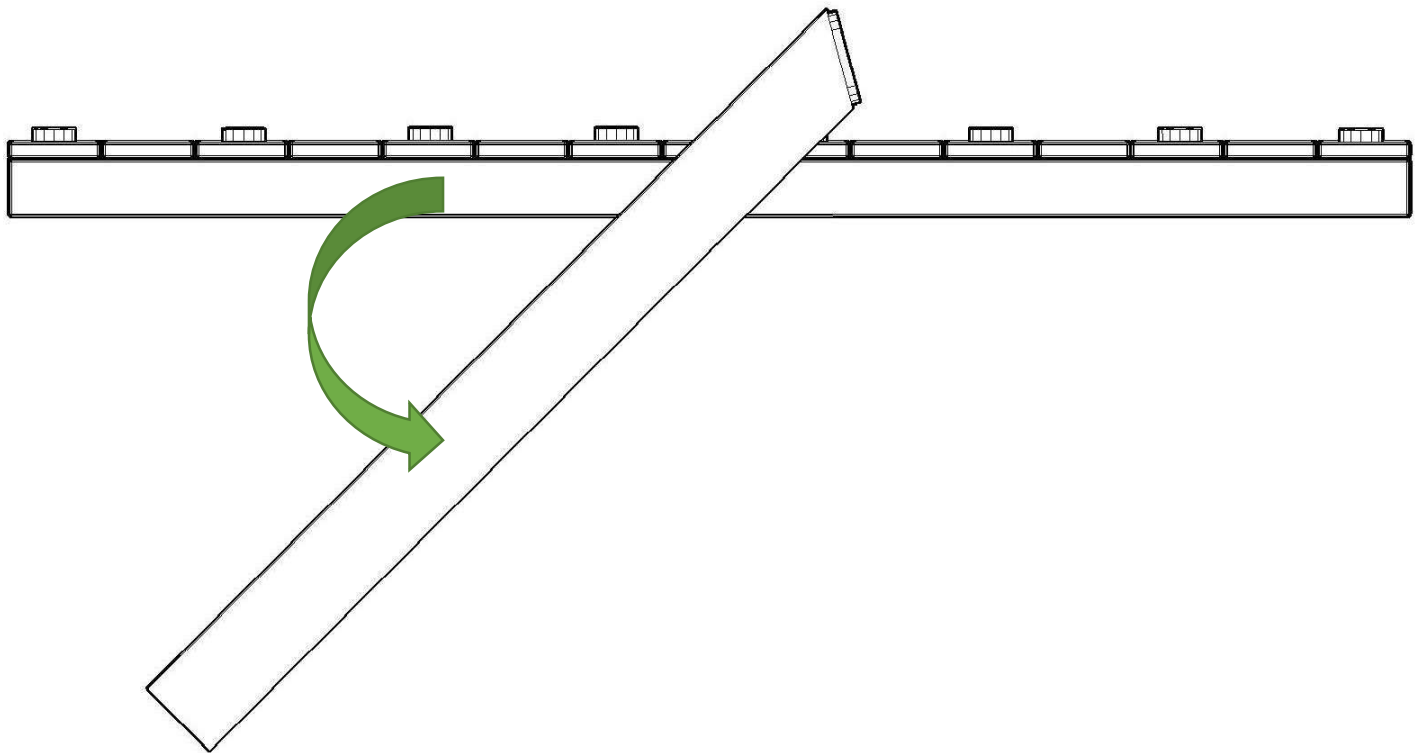

Dog Totter Assembly (Contd.)

When the support posts are in place, pour concrete per your bag instructions and our recommended depths. The installation is complete!

