

Surface Mount

Materials



Main Body: 1.5" schedule 40 pipe
Manual air pump: Dero made
Foot: 1/4" steel

Finishes



An after fabrication hot dipped galvanized finish is our standard option. 250 TGIC powder coat colors, and a thermoplastic coating are also available as alternate options.


Our powder coat finish assures a high level of adhesion and durability by following these steps:

1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

Installation Methods



Surface Mount has 8" diameter x .25" flange with four anchoring holes for mounting with standard wedge anchors.

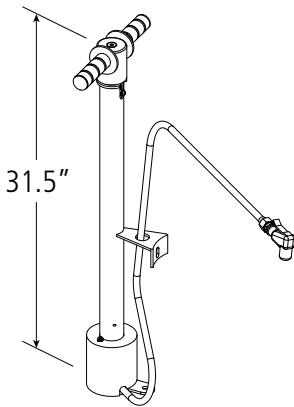

Fixit Mount

Space Use and Setbacks



The Air Kit 2 should be installed at least 36" from any obstruction.

