

**Capacity** 2-4 Bikes

**Materials**

1.5" OD 11 Gauge Tube. All open ends are capped to prevent moisture from entering. All welds are MIG welds around entire circumference of joined pieces.

**Finishes**

An after fabrication hot dipped galvanized finish is our standard option. 250 TGIC powder coat colors, thermoplastic coating, and stainless steel finishes are also available as alternate options.

Our powder coat finish assures a high level of adhesion and durability by following these steps:


1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

Stainless Steel: 304 grade stainless steel material finished in either a high polished shine or a satin finish.

**Installation Methods**



Each rack has two 2.5" x 6" mounting brackets double gusset welded to the "wheels". The brackets are 40" apart. Each bracket is anchored to the ground with two anchors. Anchors are included with each rack

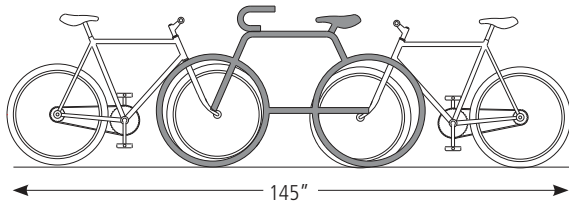

**Space Use and Setbacks**



**Wall Setbacks:**

For racks set parallel to a wall:  
Minimum: 24"  
Recommended: 36"

**For racks set perpendicular to a wall:**

Minimum: 64" (to allow maximum capacity of 4 bikes)

**Distance Between Racks:**

Minimum: 24"  
Recommended: 36"

**Street Setbacks:**

Minimum: 36"

