




Continuum 12' Diameter C-Bench - Assembly Instructions / Specifications

Model: CUU-12C-315 (71931400) Sheet 1 of 2

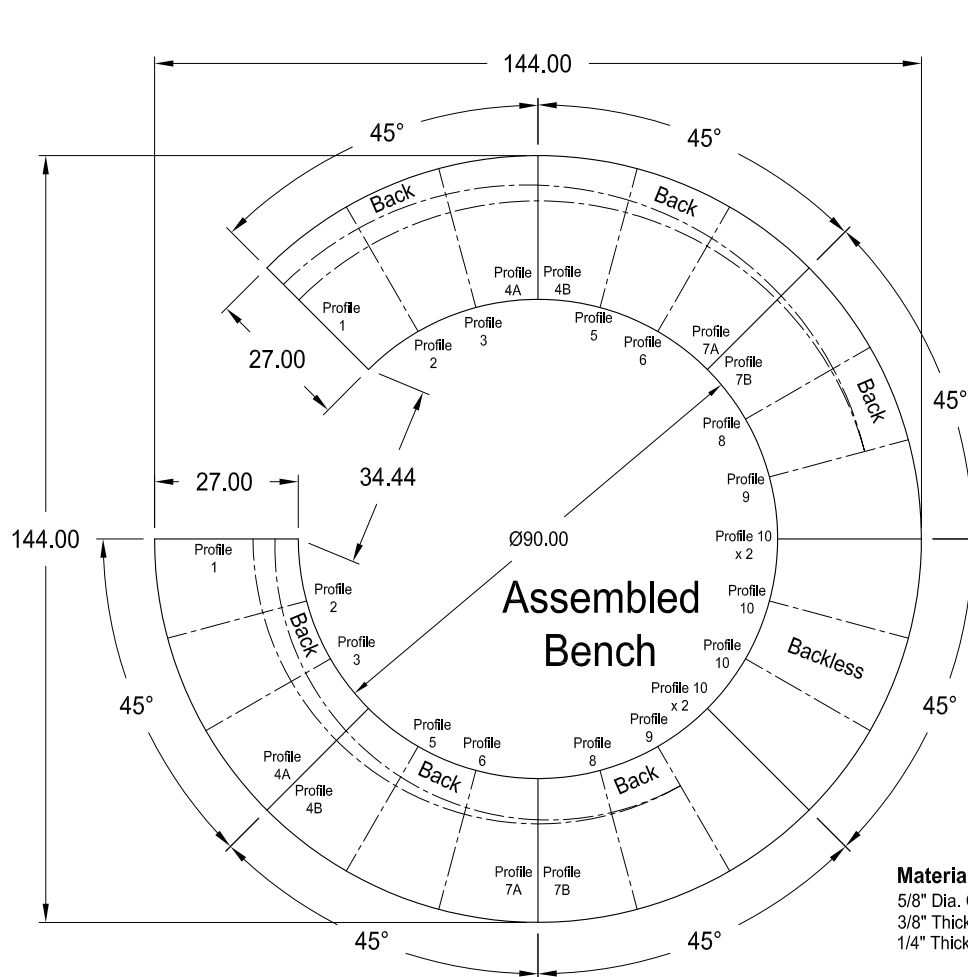

Materials:
 5/8" Dia. Cold Rolled Steel Rod
 3/8" Thick Steel (Frames)
 1/4" Thick Steel (Foot Plates)

Finish:
 Electrostatically applied polyester powder top coat. Steel components receive corrosion protection from an E-Coat Primer.

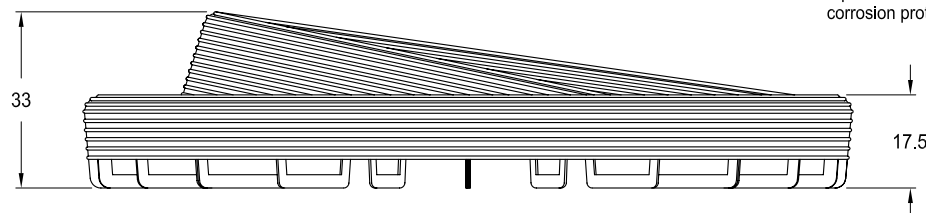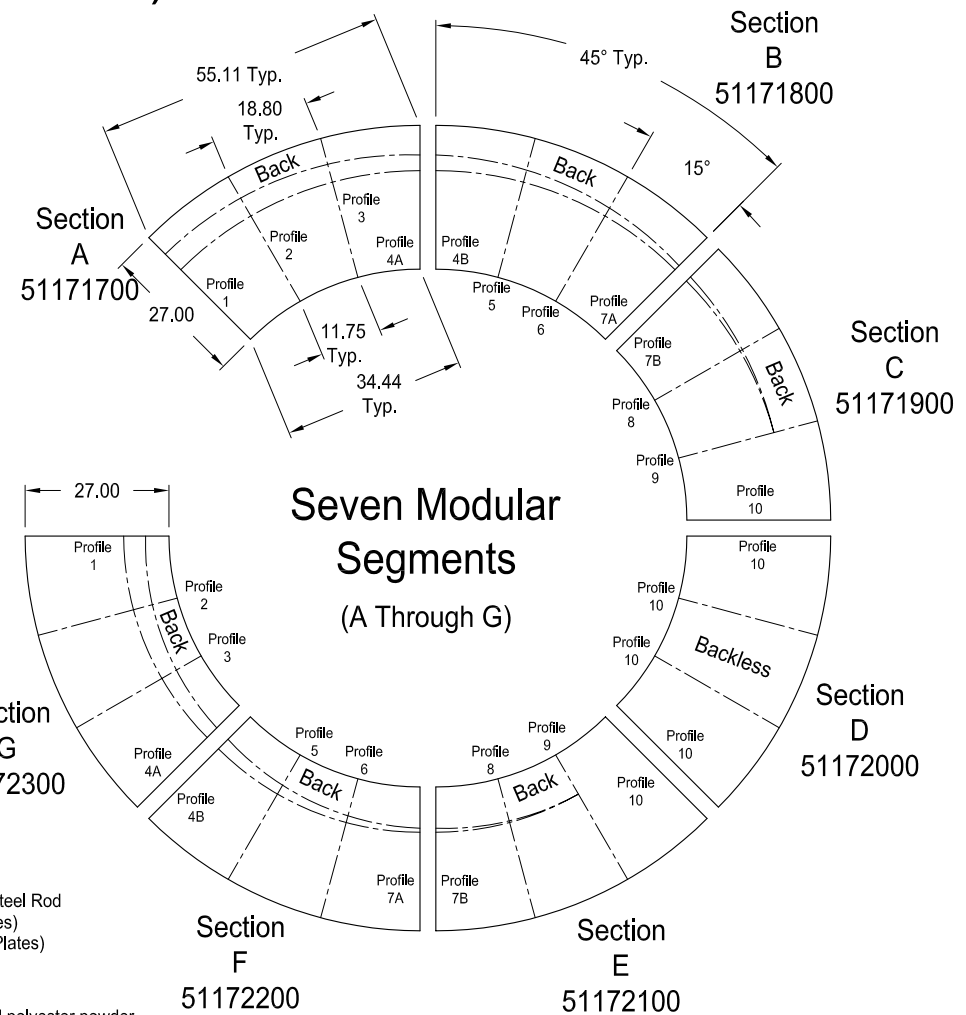

Notes:


Dimensions shown are in inches.

We have endeavoured to insure that all product specifications listed on this document were correct at the time of publication. We reserve the right to improve, alter or discontinue specifications without notice.


Continuum 12' Diameter C-Bench Assembly Instructions / Specifications

Model: CUU-12C-315 (71931400)

Sheet 2 of 2

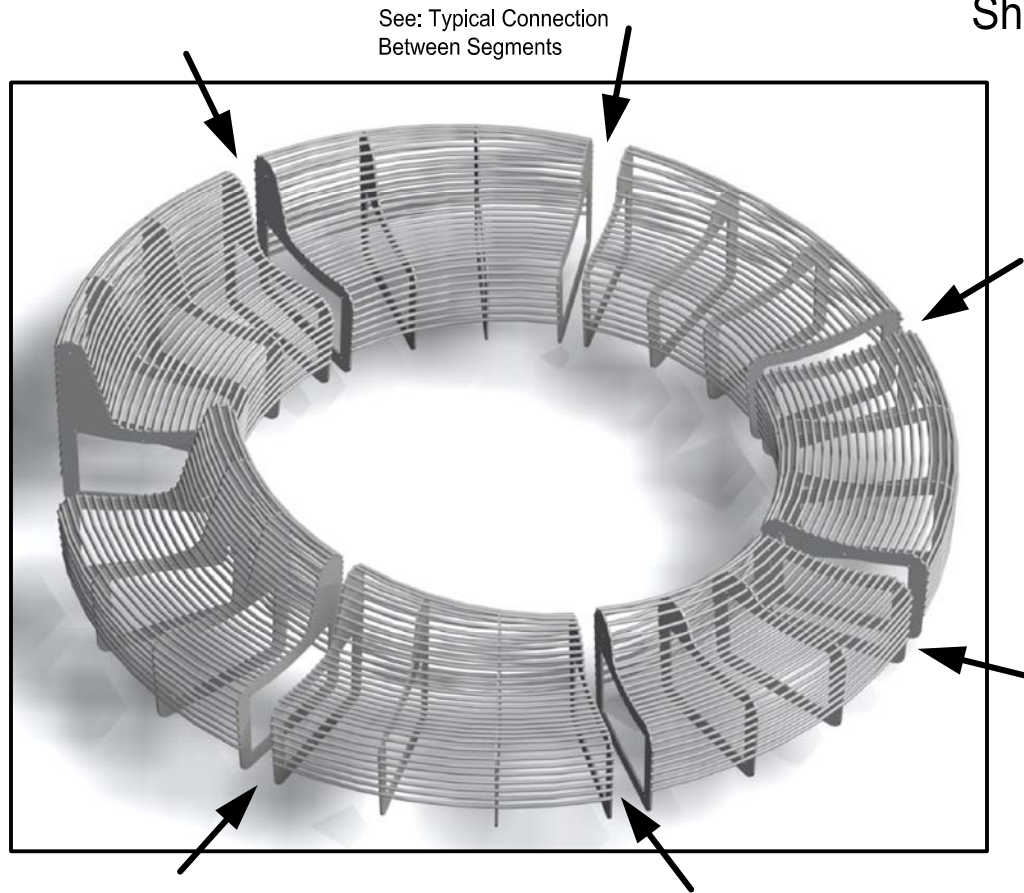

Typical Connection
Between Segments

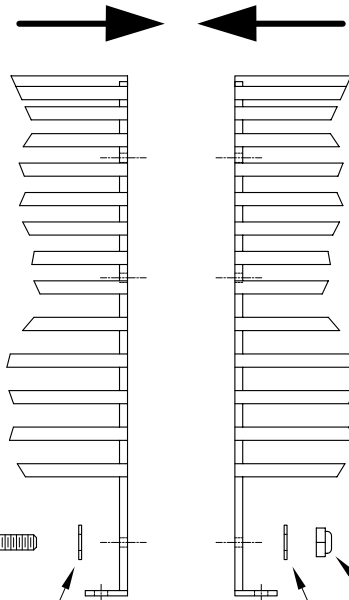


3/8-16 x 1-1/2"
B.H. Bolt

3/8 Flat Washer

3/8-16
Hex Nut

3/8 Flat Washer

Typical Segment
Connection Face

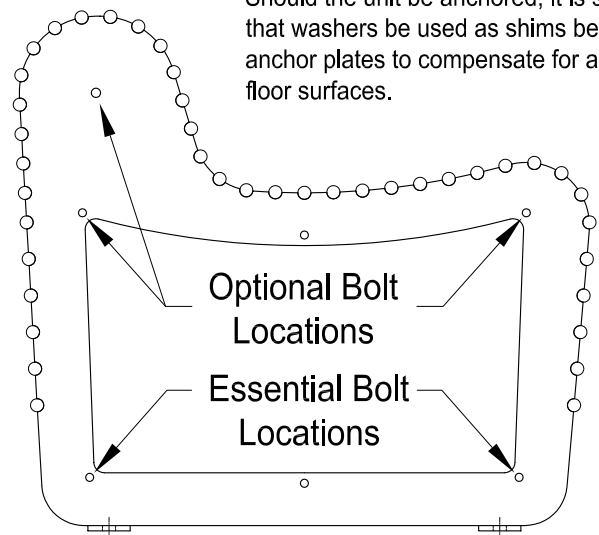

Optional Bolt
Locations

Essential Bolt
Locations

5/8" Dia. Anchor Holes

(Anchor Hardware Not Included)

Note: Anchor plates have been provided so that the purchaser can, if desired, anchor the unit to the floor. Hardware choice is at the purchasers' discretion and is not supplied. Should the unit be anchored, it is suggested that washers be used as shims beneath the anchor plates to compensate for any uneven floor surfaces.