

# MISTING COLUMN

## STANDARD FEATURES

---

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Misting Column provides 0.18 gpm
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish

## SUGGESTED SPECIFICATIONS

---

Column style mister shall be Murdock model M-PCMST84, eight nozzle mister. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Misting column nozzles shall be brass and fixture provides 0.18 gpm.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel bottom plate, providing secure mounting for shower.

## MODEL:

*(Must Specify)*

---


Satin Stainless Finish (Shown)

Green Powder-Coated

Red Powder-Coated

Blue Powder-Coated

*Custom color finishes available upon request*

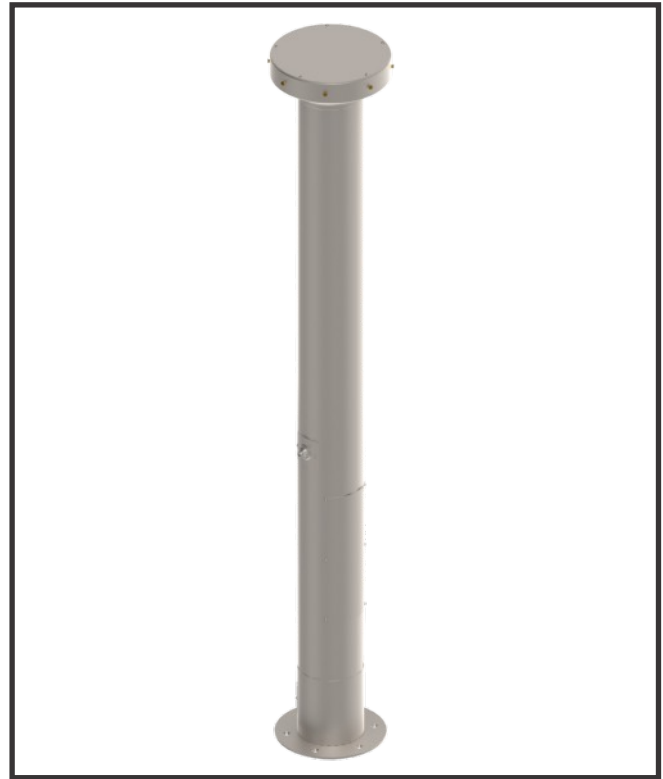

## OPTIONS

*(additional costs may be incurred)*

---

- FRU1 Underground freeze-resistant valve for one pushbutton <sup>1</sup>
- HB1 Hose bibb, compression with hose thread outlet outlet VB <sup>1</sup>
- HB2 Hose bibb, loose key with hose outlet thread VB <sup>1</sup>
- HB3 Hose bibb, loose key, vandal resistant with hose outlet thread VB <sup>1</sup>
- IAP In-ground anchor plate (replaces standard anchor plate) <sup>1</sup>
- LOGO Customer specified logo <sup>1</sup>

*Options Notes:*

<sup>1</sup> See separate option sheet.




Member of  
U.S. Green  
Building  
Council



Recyclable  
Product

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

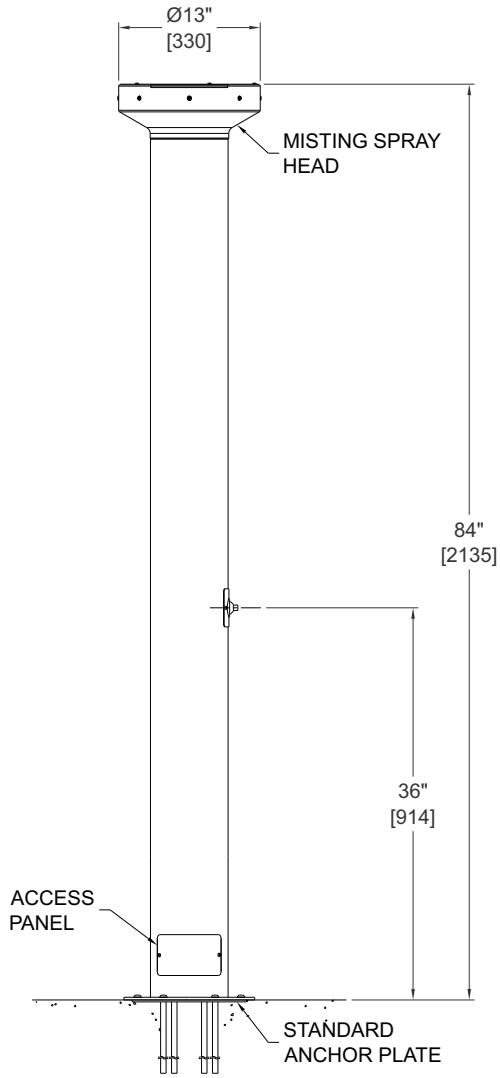

GENERAL NOTES:  
 1. ALL DIMENSIONS ARE IN INCHES [MM].

