

PET FOUNTAIN WITH HOSE BIBB AND HOSE HOLDER

STANDARD FEATURES

- 100 mesh inlet strainer
- Hose holder (hose furnished locally)
- Pushbutton requiring less than 5 pounds for activation
- Chrome plated hose bibb with vacuum breaker
- Stainless Steel, anti-rotation, non-squirt bubbler for pet fountain
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basin
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Pet fountain shall be Murdock model M-PM14. Model shall include a pet fountain, hose bibb with vacuum breaker and a hose holder. Pet fountain pushbutton shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valve.

Pet fountain bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowl. Bottom plate shall be 3/16" thick and include three mounting holes with two additional mounting holes for pet fountain. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Model M-PM14 Shown

MODEL:

(Must Specify)

Satin stainless finish (Shown)

Green powder-coated

Red powder-coated

Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU1 Freeze Resistant, 1 valve ^{1,2}
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option sheet.

² This option does not provide freeze resistance for Hose Bibb.

Complies with the following standards:



Member of
U.S. Green
Building
Council




Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PET FOUNTAIN W/ HOSE BIBB AND HOSE HOLDER

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

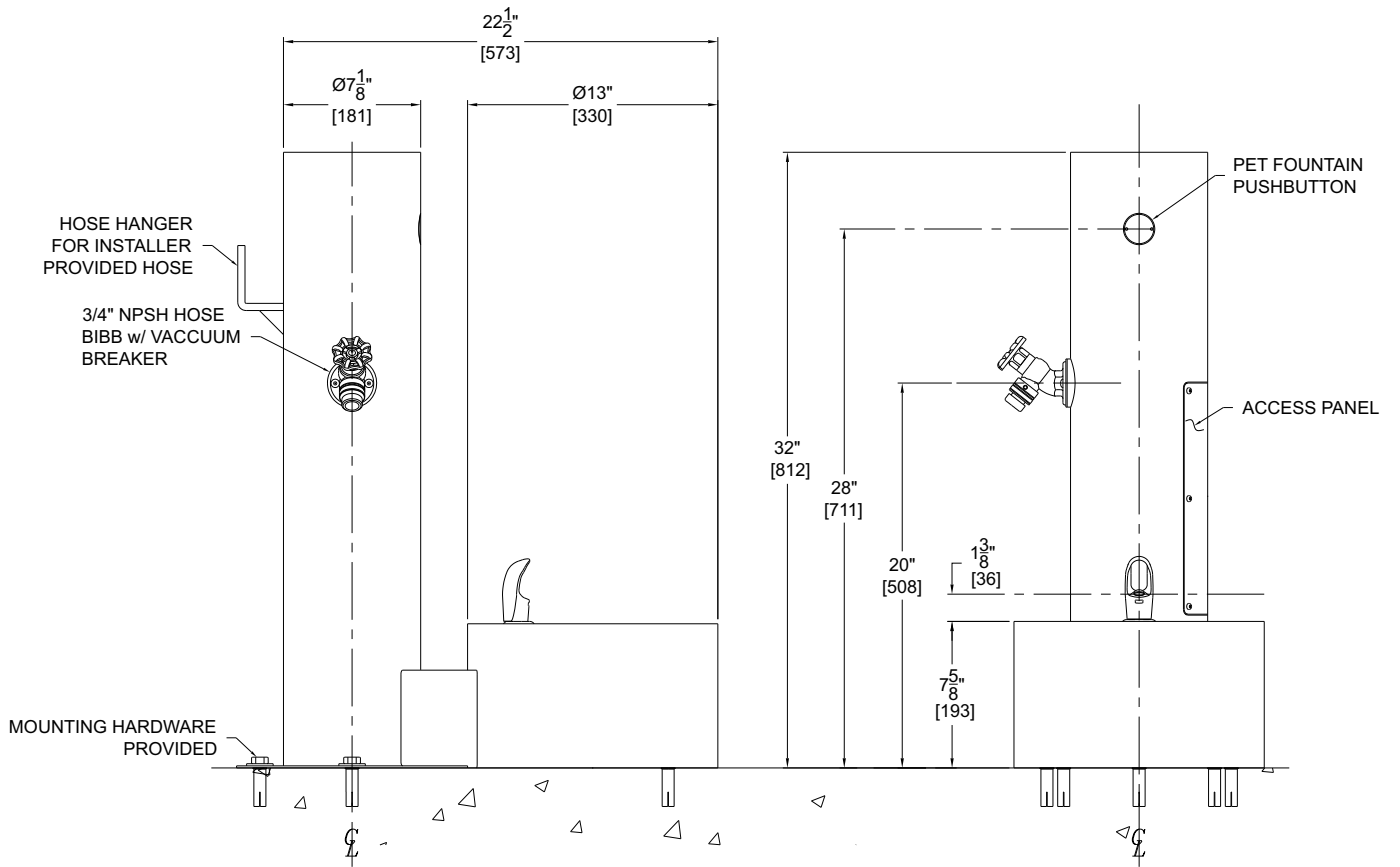

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].