

Round Pedestal Push Button Pet Fountain Receptor

STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Stainless steel, anti-rotation, non-squirt bubbler
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basin
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Pet fountain pushbutton shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valve.

Bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowl. Bottom plate shall be 3/16" thick and include three mounting holes with two additional mounting holes for pet fountain. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM34

MODEL:

(Must Specify)

Satin stainless finish (Shown)
Green powder-coat
Red powder-coat
Blue powder-coat
Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU1 Underground freeze-resistant valve ¹
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option sheet.

Complies with the following standards:



Member of
U.S. Green
Building
Council




Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PET FOUNTAIN

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

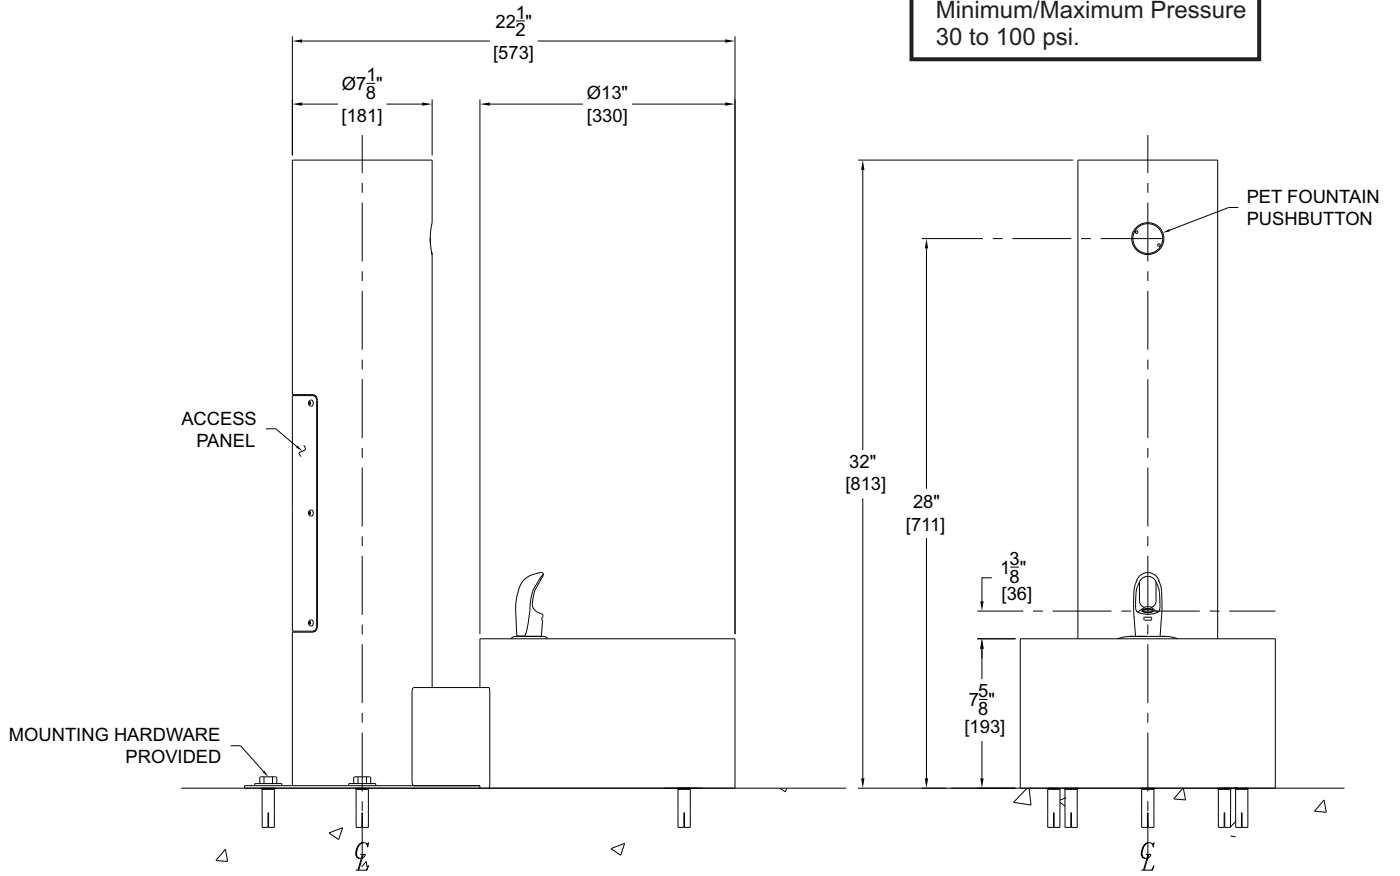

GENERAL NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].