

Square Concrete Pedestal Mount Outdoor Drinking Fountain

STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant

SUGGESTED SPECIFICATIONS

Square Concrete Pedestal Mount Outdoor Drinking Fountain is a vandal resistant square drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.

Options Notes:

¹ See separate option sheet.

² This option is not available freeze-resistant.

Complies with the following standards:



MODEL:

(Must Specify)

Tan Concrete Aggregate

Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

- ☐ -CH30 Child height, 30" bubbler height
- ☐ -FRU1 Freeze resistant, 1 valve ¹
- ☐ -FRU2 Freeze resistant, 2 valves ¹
- ☐ -FRU3 Freeze resistant, 3 valves ¹
- ☐ -FS Foot spray
- ☐ -HB1 Hose bibb, compression, with hose threaded outlet/VB ^{1 2}
- ☐ -HB2 Hose bibb, loose key, with hose threaded outlet/VB ^{1 2}
- ☐ -HB4 Hose bibb, loose key, recessed vandal resistant, with hose threaded outlet/VB ^{1 2}
- ☐ -IGM In-ground 14" mounting
- ☐ -JF1 Jug filler, spigot, self-closing valve with plain end ^{1 2}
- ☐ -JF2 Jug filler, pushbutton, self-closing valve with plain end ¹
- ☐ -NP1 Non-pollutable, freeze resistant, 1 valve
- ☐ -NP2 Non-pollutable, freeze resistant, 2 valves
- ☐ -NP3 Non-pollutable, freeze resistant, 3 valves
- ☐ -PF Pet fountain
- ☐ -SCS Square concrete step for pedestal fountain



Member of
U.S. Green
Building
Council



Recyclable
Product




Water
Conserving
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PEDESTAL MOUNTED DRINKING FOUNTAIN

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

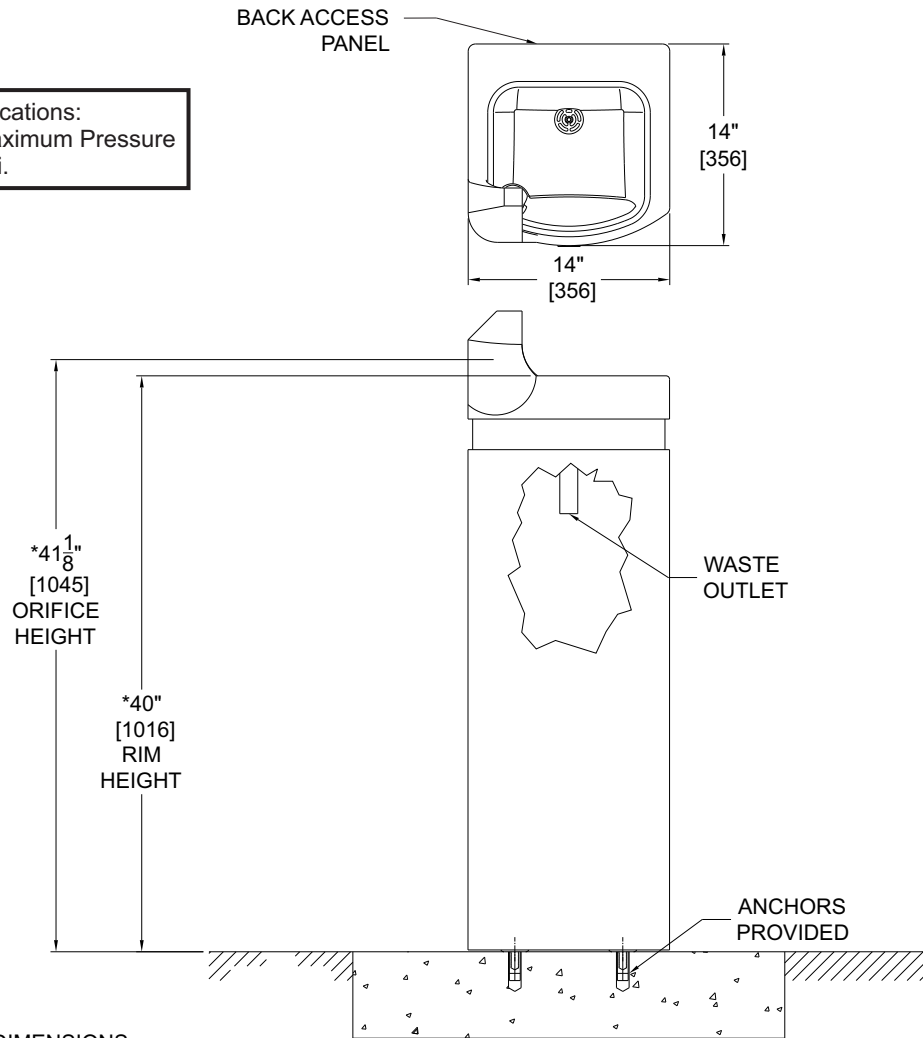

GENERAL DIMENSIONS:

- *2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 HEIGHT MODEL AVAILABLE.
- 3. STOP VALVE NOT PROVIDED.