

Square Concrete Pedestal Mount Outdoor Drinking Fountain-Tri Level

STANDARD FEATURES

- Both Adult and Child ADA Compliant (when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate



MODEL:

(Must Specify)

Tan Concrete Aggregate

Brown Concrete Aggregate (Shown)

OPTIONAL ACCESSORIES

(additional costs may be incurred)

- ☐ -FRU3 Freeze resistant, 3 valves ¹
- ☐ -FRU4 Freeze resistant, 4 valves ¹
- ☐ -FS Foot spray
- ☐ -HB1 Hose bibb, compression, with hose threaded outlet/VB ^{1 2}
- ☐ -HB2 Hose bibb, loose key, with hose threaded outlet/VB ^{1 2}
- ☐ -HB4 Hose bibb, loose key, recessed vandal resistant, with hose threaded outlet/VB ^{1 2}
- ☐ -IGM In-ground 14" mounting
- ☐ -JF1 Jug filler, spigot, self-closing valve with plain end ^{1 2}
- ☐ -JF2 Jug filler, pushbutton, self-closing valve with plain end ¹
- ☐ -NP3 Non-pollutable, freeze resistant, 3 valves
- ☐ -NP4 Non-pollutable, freeze resistant, 4 valves
- ☐ -PF Pet fountain
- ☐ -SCS Square concrete step ¹

Options Notes:

¹ See separate option sheet.

² This option is not available freeze-resistant.



Member of
U.S. Green
Building
Council



Recyclable
Product



Water
Conserving
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SUGGESTED SPECIFICATIONS

Square Concrete Pedestal Mount Outdoor Drinking Fountain Tri-Level is a barrier free pedestal mounted, vandal resistant, tri-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Complies
with the
following
standards:




Water Efficiency



Federal
Public Law
111-380
(No Lead)

CHSC
116875

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

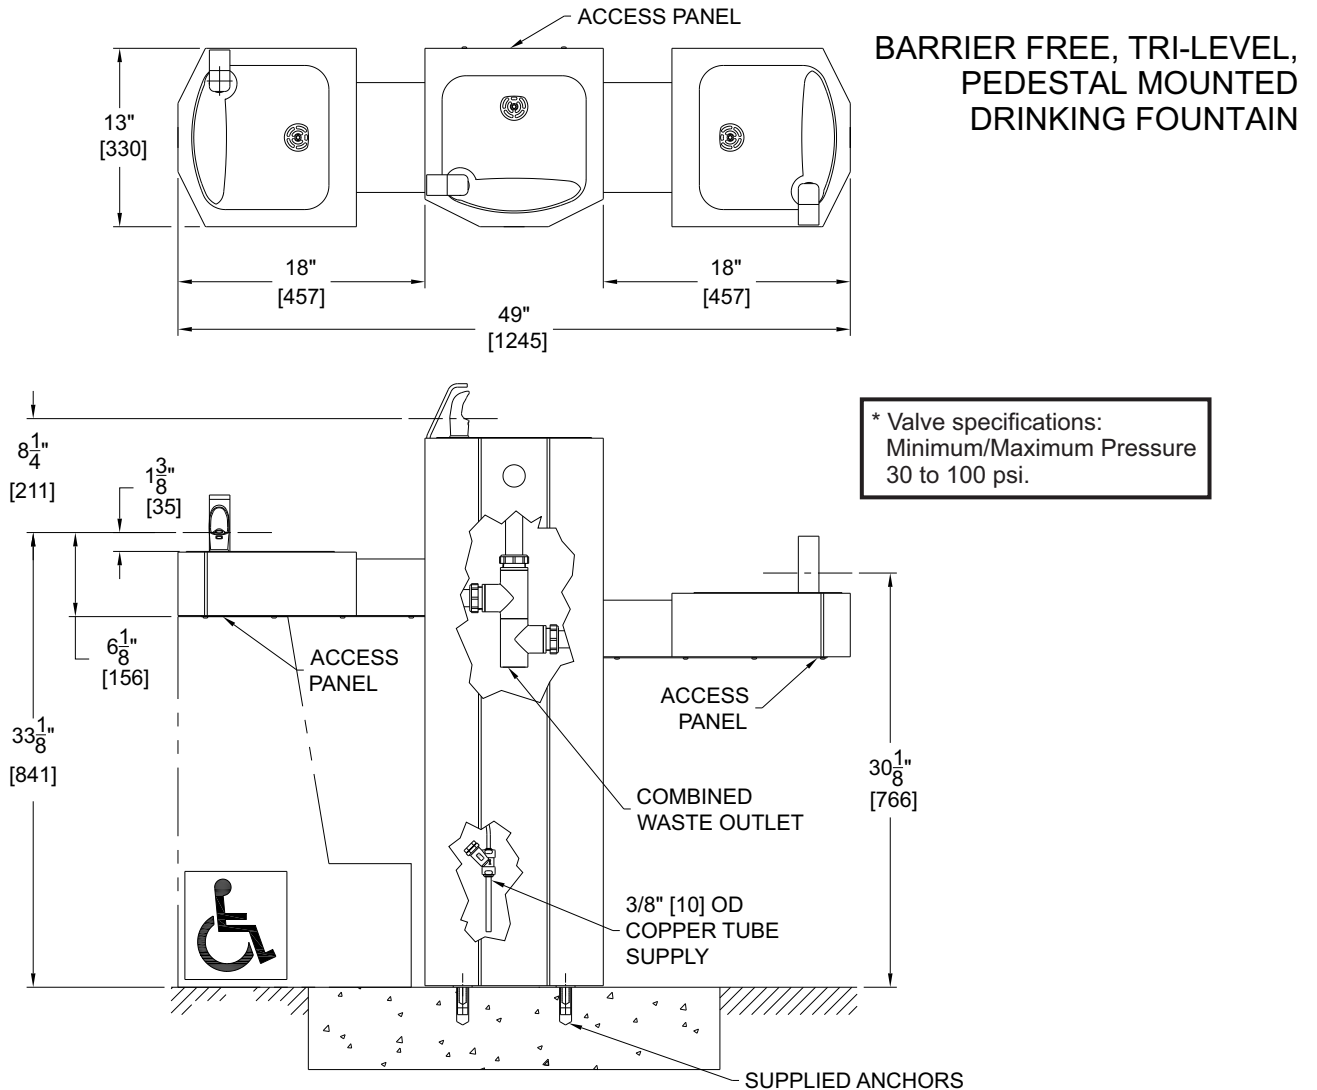

GENERAL DIMENSIONS:
1. ALL DIMENSIONS ARE IN INCHES [MM]
2. STOP VALVE NOT PROVIDED