

DUAL STATION PET FOUNTAIN

STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Stainless steel, anti-rotation, non-squirt bubblers
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basins
- Heavy duty, 304 stainless steel polished to a satin finish

SUGGESTED SPECIFICATIONS

Model shall include two pet fountains. Pet fountain pushbuttons shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valves.

Bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowls. Bottom plate shall be 3/16" thick and include two mounting holes with four additional mounting holes for pet fountains. 1/2" expansion anchor bolts are furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



MODEL:

(Must Specify)

Satin stainless finish (Shown)

Green powder-coated

Red powder-coated

Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- FRU2 Underground freeze-resistant valve ¹
- IAP In-ground anchor plate ¹
- LOGO Customer Specified logo ¹

Options Notes:

¹ See separate option sheet.

Complies with the following standards:



Member of
U.S. Green
Building
Council




Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

DUAL STATION PET FOUNTAIN

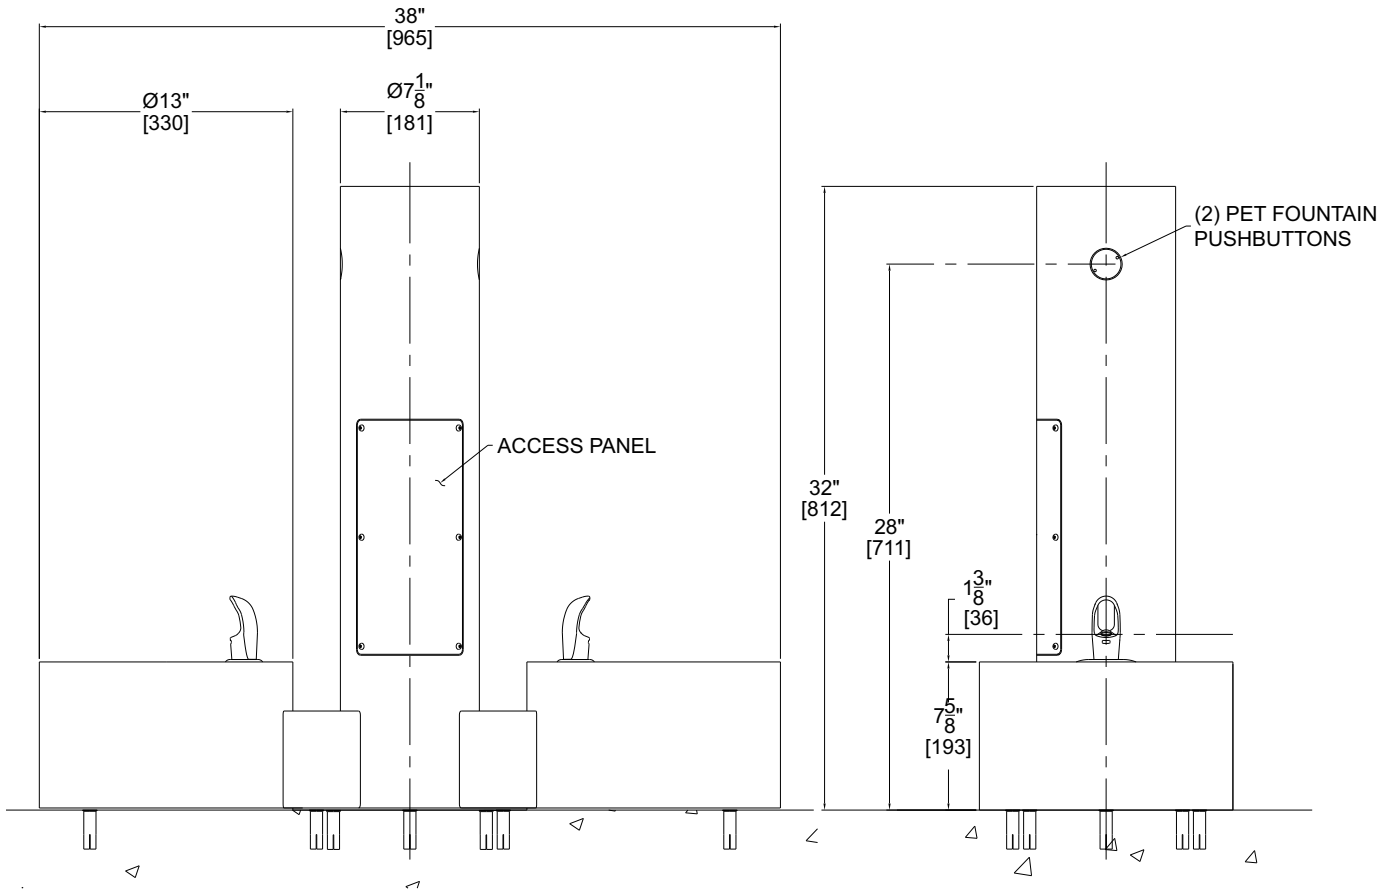

NOTES:
1. ALL DIMENSIONS ARE IN INCHES [MM].