

# PET WASH WITH DUAL HOSE CONNECTIONS AND HOSE HOLDER

## STANDARD FEATURES

---

- 100 mesh inlet strainer
- Hose holder (hoses furnished locally)
- Pushbutton requiring less than 5 pounds for activation
- Metering air control valves timing adjustable from 5 to 60 seconds
- Dual 3/4" hose outlets include vacuum breakers
- Vandal resistant stainless steel access panel
- Heavy duty, 304 stainless steel polished to a satin finish

## SUGGESTED SPECIFICATIONS

---

Valves shall be internally mounted metering valves, pushbutton operated and requires less than 5 pounds of force to activate. Timing can be adjusted from 5 to 60 seconds.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish. Bottom plate shall be 3/16" thick and include four mounting holes. 1/2" expansion anchor bolts shall be furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM54

### MODEL:

*(Must Specify)*

---

Satin stainless finish (Shown)  
Green powder-coat  
Red powder-coat  
Blue powder-coat  
*Custom color finishes available upon request*

### OPTIONS

*(additional costs may be incurred)*

---

- FRU2 Underground freeze-resistant valve <sup>1</sup>
- IAP In-ground anchor plate <sup>1</sup>
- LOGO Customer Specified logo <sup>1</sup>

*Options Notes:*

<sup>1</sup> See separate option sheet.

Complies with the following standards:



Member of  
U.S. Green  
Building  
Council




Recyclable  
Product

WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 psi.

### PET FOUNTAIN WITH DUAL HOSE BIBB AND HOSE HOLDER

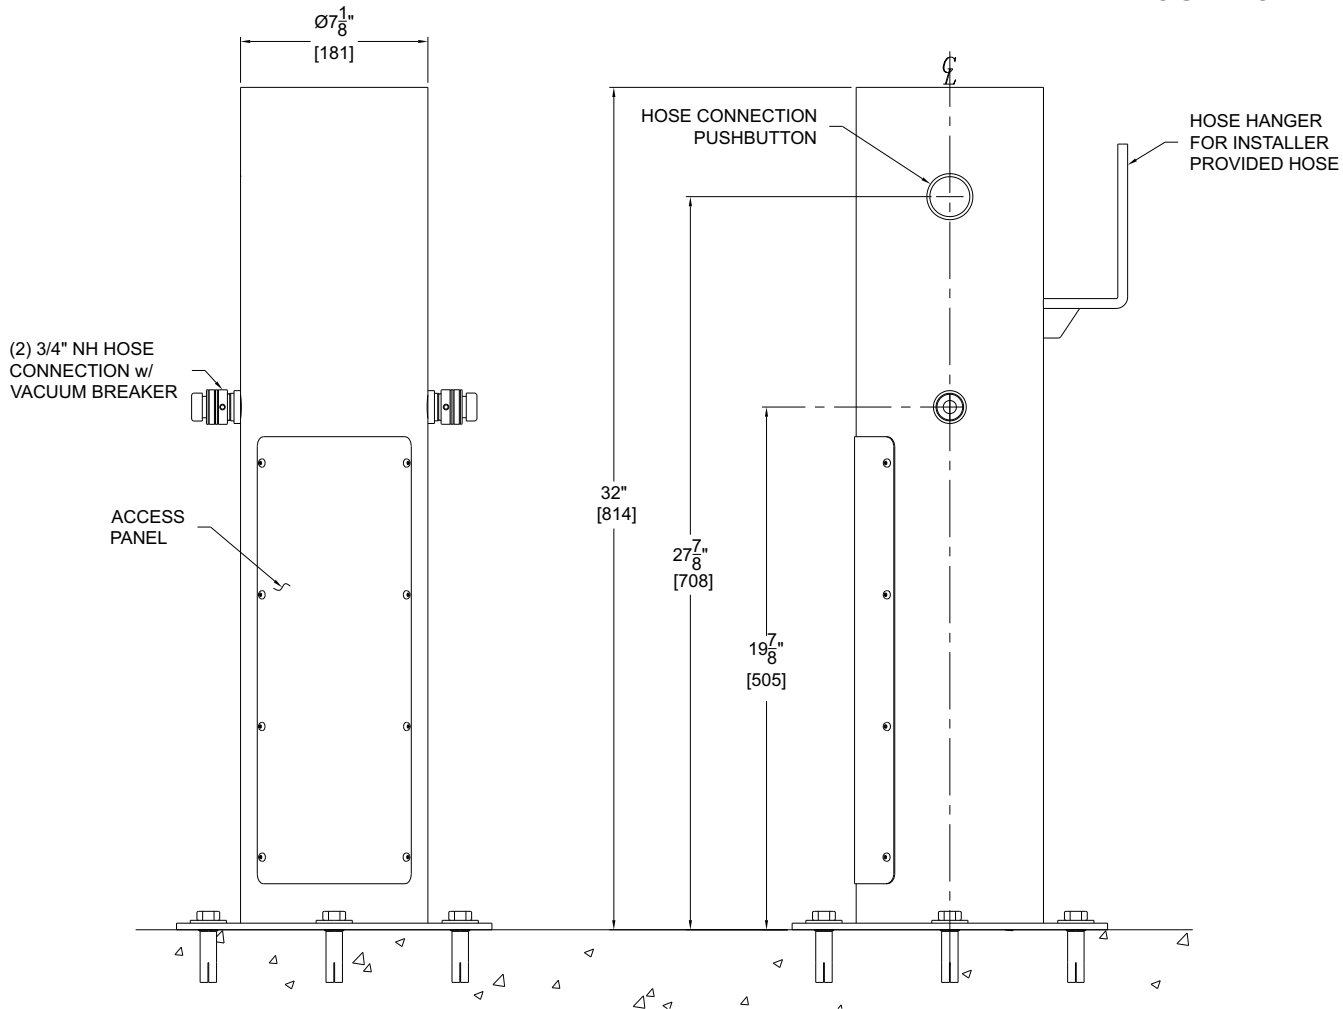

GENERAL NOTES:  
1. ALL DIMENSIONS ARE IN INCHES [MM].