

BARRIER-FREE OUTDOOR PEDESTAL BI-LEVEL DRINKING FOUNTAIN WITH BOTTLE FILLER

STANDARD FEATURES

- *Adult ADA compliant*
- *Pushbutton and hands-free sensor operated Bottle filler*
- *Battery pack 6-AA*
- *Laminar flow water supply to bottle filler*
- *Resistant to sunlight, heat, moisture and wear*
- *18 Gage, 304 stainless steel drinking fountain bowls*
- *12 Gage, heavy duty stainless steel construction with corrosion and scratch resistant finish*
- *Stainless steel, anti-rotation non-squirt bubbler*
- *100-mesh inlet strainer*
- *Lead and cyst filter (Not available with FRU option)*
- *Access cover, heavy duty stainless steel, vandal resistant*

SUGGESTED SPECIFICATIONS

Barrier-free drinking fountains with bottle filler shall be Murdock model GYV34. Construction shall be 12 gage, all stainless steel with 18 gage stainless steel fountain bowls. Pedestal base shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9-volt sensor or a pushbutton as standard and provide 1.0 GPM flow. Unit shall contain a 100-mesh inlet strainer, lead and cyst filter, 6-AA battery pack and laminar flow spout. Self-closing pushbutton, needing less than 5 pounds of force, shall activate internally mounted valves with adjustable stream regulators. Bubblers shall be stainless steel with non-squirt feature and operate on water pressure range of 20-105 PSIG. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA requirements when mounted appropriately.



Model GYV34 Shown

MODEL: *(Must Specify)*

Satin Stainless Finish (Shown)
Green Powder-Coated
Red Powder-Coated
Blue Powder-Coated

OPTIONAL ACCESSORIES *(additional costs may be incurred)*

- CV Cartridge valve on fountains (Not available with freeze-resistant valve)
- FRU3 Underground freeze-resistant, 3 valves¹ (Less filter and sensor)
- FRU4 Underground freeze-resistant, 4 valves¹ (Less filter and sensor)
- IAP In-ground anchor plate
- LOGO Customer specified logo
- MO Bottle filler operated by pushbutton only (Standard with freeze-resistant valves)
- PF Pet fountain ¹

Option Notes:

¹*See separate option sheet*

Complies with the following standards:



Member of
U.S. Green
Building
Council




Recyclable
Product




Water
Conserving
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

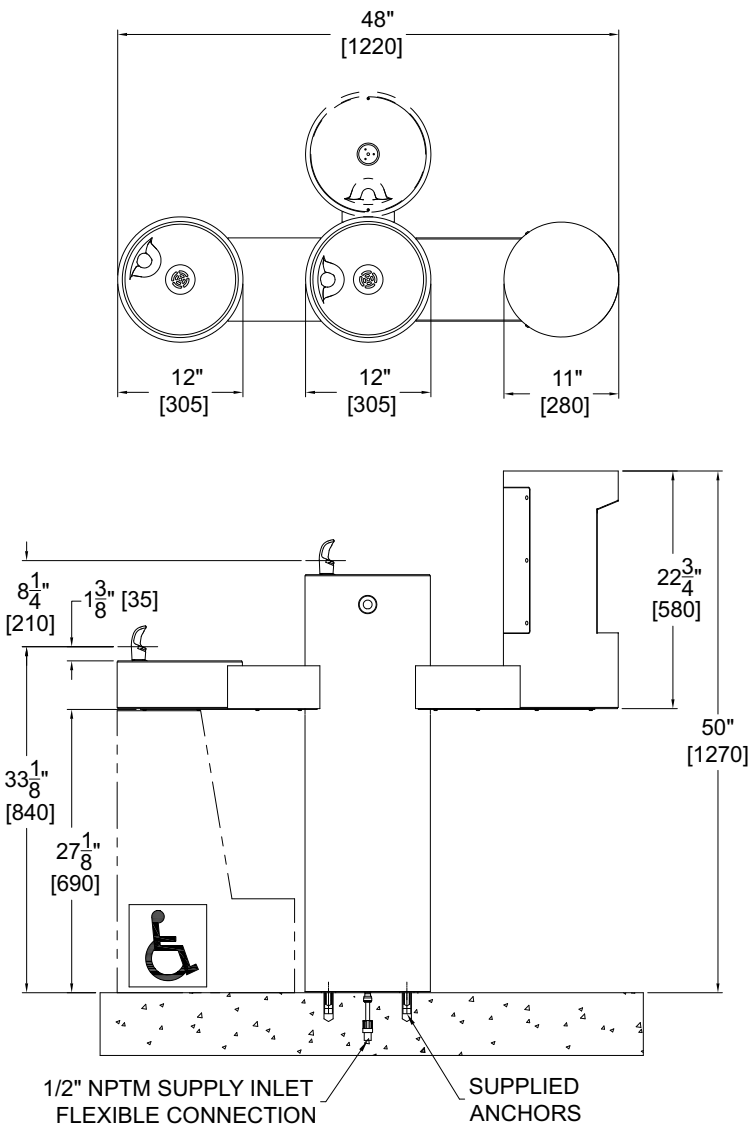

**BARRIER-FREE OUTDOOR
PEDESTAL BI-LEVEL DRINKING
FOUNTAIN WITH BOTTLE FILLER**

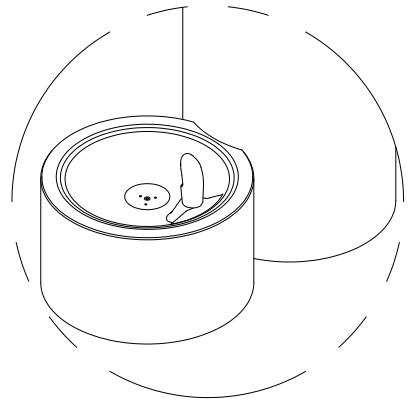

**OPTIONAL -PF PET FOUNTAIN
DETAIL**

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 PSI.