Round Concrete Pedestal Mount Outdoor Drinking Fountain

STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer

SUGGESTED SPECIFICATIONS

Model GUF99 is a pedestal mounted, vandal resistant round drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.

Options Notes:

See separate option sheet.

² This option is not available freeze-resistant.



MODEL:

(Must Specify)

Tan Concrete Aggregate

Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

- ☐ -CH30 Child height, 30" bubbler height
- -FRU1 Freeze resistant, 1 valve 1
- -FRU2 Freeze resistant, 2 valves 1
- -FRU3 Freeze resistant, 3 valves 1
- ☐-FS Foot spray
- ☐ -HB1 Hose bibb, compression, with hose threaded
 - outlet/VB 1 2
- Hose bibb, loose key, with hose threaded outlet/VB 1 2 ☐ -HB2
- ☐ -HB4 Hose bibb, loose key, recessed vandal resistant,
 - with hose threaded outlet/VB 12
- -IGM In-ground 14" mounting
- 🔲 -JF1 Jug filler, spigot, self-closing valve with plain end 12
- 🔲 -JF2 Jug filler, pushbutton, self-closing valve with plain end 1
- □ -NP1 Non-pollutable, freeze resistant, 1 valve
- □ -NP2 Non-pollutable, freeze resistant, 2 valves
- □ -NP3 Non-pollutable, freeze resistant, 3 valves
- □ -PF Pet fountain
- □ -RCS Round concrete step for pedestal fountain


















IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

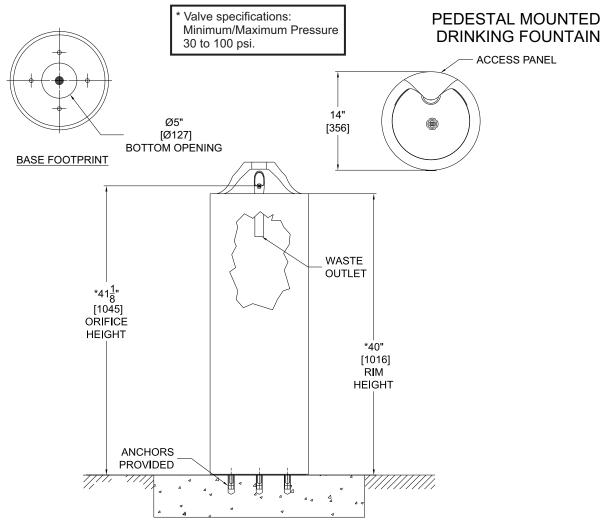

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD HEIGHT MODEL AVAILABLE.
- 3. STOP VALVE NOT PROVIDED.